

J1 Joey

Task Support **Vehicle**

Patents Pending

elevations of 126", 162" or 192"

CAPACITY

1,000 lbs. total vehicle capacity up to 126" elevation

- 300 lbs. operators compartment
- 500 lbs. front work platform
- 200 lbs. rear "hide away" tray

2,268 lbs. to 3,160lbs chassis only

WHEELS / TIRES

DRIVE (1)9" x 3" polyurethane **STABILITY Caster** (2)3" x 2" polyurethane **REAR Wheels** (2)8" x 3" rubber

BATTERY COMPARTMENTS

J1-126 & J1-162: 29.1" x 7.9" x 30" J1-192: 32" x 11" x 30"

24-volt ZAPI AC-0 travel controller with 4 operator selectable travel settings and turtle speed mode. Standard travel speeds are varibale from 0 to 3.4 mph with a high speed option available or ground level travel of up to 5 mph. Lift speed up to 42 fpm.

ELECTRICAL

24-volt AC system manages the vehicles' electronic power steering, acceleration, neutral braking and automatic speed reduction at height and during tight turns when cornering.

provides high torque AC drive motor throughout the entire drive range. The brushless design of AC technology drastically reduces maintenance and extends battery range. Lift and lower controls are single speed.

Zapi LCD dashboard display includes fault code, hour meter, battery state of charge, travel speed and drive wheel directional The Joey comes with an indicator. emergency power disconnect, switch and horn as standard equipment.

MAST

Heavy duty I-beam design provides excellent stability at height. Steel mast channels and side mounted lift cylinders increases platform capacity.

.11-192

CHASSIS

Three point chassis design with along with 180° drive motor steering arc provides exceptional maneuverability. Powerhead mounted stability casters add additional truck stability and operator confidence at working heights of up to twenty feet.

OPERATOR COMPARTMENT

Ergonomic fingertip control for travel, lift, and lower functions provide the operator with logical intuitive drive characteristics while traveling at elevation or lowered.

Roomy operator compartment is designed for productivity. Large storage compartment allows storage of clip boards, pens, miscellaneous fulfillment tools. Retractable compartment side-rails with audible alarm when raised.

REGENERATIVE BRAKES

Regenerative braking is applied when the operator removes their hand from travel control or when travel speeds are reduced, Electromagnetic parking brake is applied after the truck is stopped.

STANDARD FEATURES

- Electronic power steering
- Hide away rear work tray
- Front and rear flashing light
- Battery compartment rollers

OPTIONAL EQUIPMENT

- Anchor w/tether and harness
- High speed travel
- Tow hitch (2,500lb tow capacity)
- 224AH AGM battery pack w/120v charger
- Industrial battery with external charger
- 12 volt power outlet adapter

OPERATOR CONTROLS



Left Hand




Right Hand

SEE THROUGH FRONT WORK PLATFORM



J1 Joey Task Support Vehicle

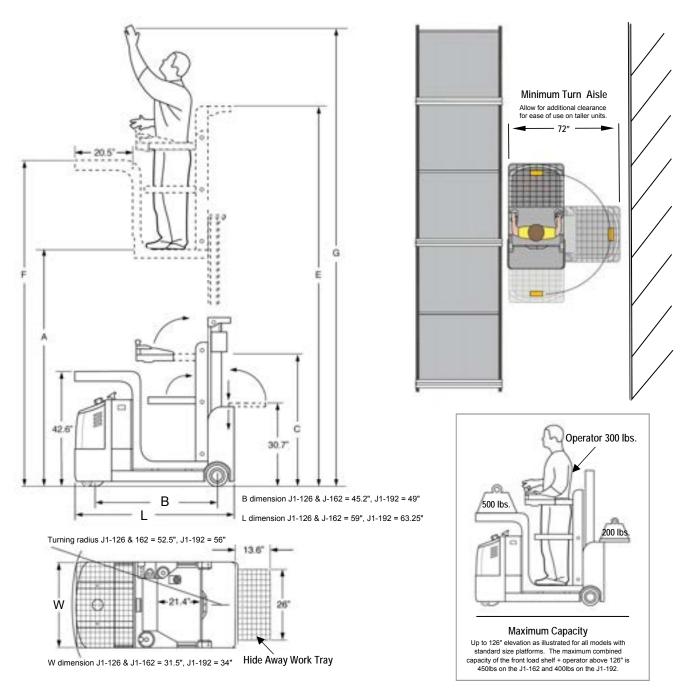

| Model # | Mast | Lift Height | Col Height | Extended Height | Load Tray Height | Working Height | Weight Chassis Only |
|---------|---------------------------|----------------|---------------|--------------------|---------------------|-------------------|---------------------------|
| J1-126 | Triple Stage | 126 | 62.6 | 178.6 | 159.0 | 203 | 2268 |
| J1-162* | Triple Stage Triple Stage | 162 | 82.75 | 235.0 | 195.0 | 239 | 2610 |
| J1-192* | Triple Stage | 192 | 83.25 | 265.0 | 225.0 | 269 | 3160 |

^{*} Consult factory for derate

For indoor use only on level and smooth surfaces

Certification