

A Critical Look at

# Surgical Case Carts

Single- & Double-Width Stainless Steel Case Carts • Internal & External Components

*6"-diameter plate casters* ... *Interlocking cabinet design* ... *Stainless steel interchangeable chassis* ... *Double-panel reinforced doors with drainage* ... *Removable/adjustable latches* ... *Stainless steel roller bearing drawer slides* ... *Internal adjustable shelves with shelf lock* ... *Individually-replaceable components* ... *See inside for more standard features* →



*double-width cart shown with  
pull-out shelves*



# Features and Benefits

## Double-Width Carts




### STANDARD FEATURES — Please note: ***Bold/italicized text*** indicates what most competitors do not have as standard.

- A Cabinet** — 18 gauge type 300 stainless steel; Hemmed safety edges on all openings; ***Interlocking construction***, for a rigid and quieter cabinet, absorbs vibrations, prevents body torque and warping; Integrated weep holes promote drainage.
- B Top** — 16 gauge type 300 stainless steel; reinforced with hemmed C-channels.
- C Doors** — 20 gauge stainless steel; Double-panel; Integral drain system; Reinforced with X-channels; Doors swing 270° open (all the way to the side of the cabinet); ***Field-replaceable spring-loaded nylon roller latches*** hold doors open.
- D Handles** — Protruded, ***field-replaceable*** heavy duty nylon fiberglass with center brackets, one on each side of cabinet.
- E Document Holders** — 8.5" x 11" letter-size; Stainless steel; One on each side of cabinet; Optional sizes available.
- F Dolly Frame** — 16 gauge stainless steel 2" square tubing; 12 gauge caster mounting plates; Non-marring bumper with ***field-replaceable individual reinforced corners*** prevent damage to cabinet and nearby walls.
- G Casters** (see "Step 2" on back page) — Stainless steel fork; ***6"-diameter wheels***; Polyurethane tread; Grease fittings; Cart-washable; Swivel casters available include casters with brake and swivel-lock casters, which prevent case cart from "fishtailing" during transport.
- H Internal Shelves** (see "Step 3" on back page) — 14 gauge ***slides with stainless steel high-temperature bearings***; Shelf slide lock prevents shelf and contents from sliding out of cabinet; Removable—or adjustable in 2" increments—with no tools required; Offered are perforated stainless steel, solid stainless steel, and heavy gauge wire shelves.

# Features and Benefits

## Single-Width Carts

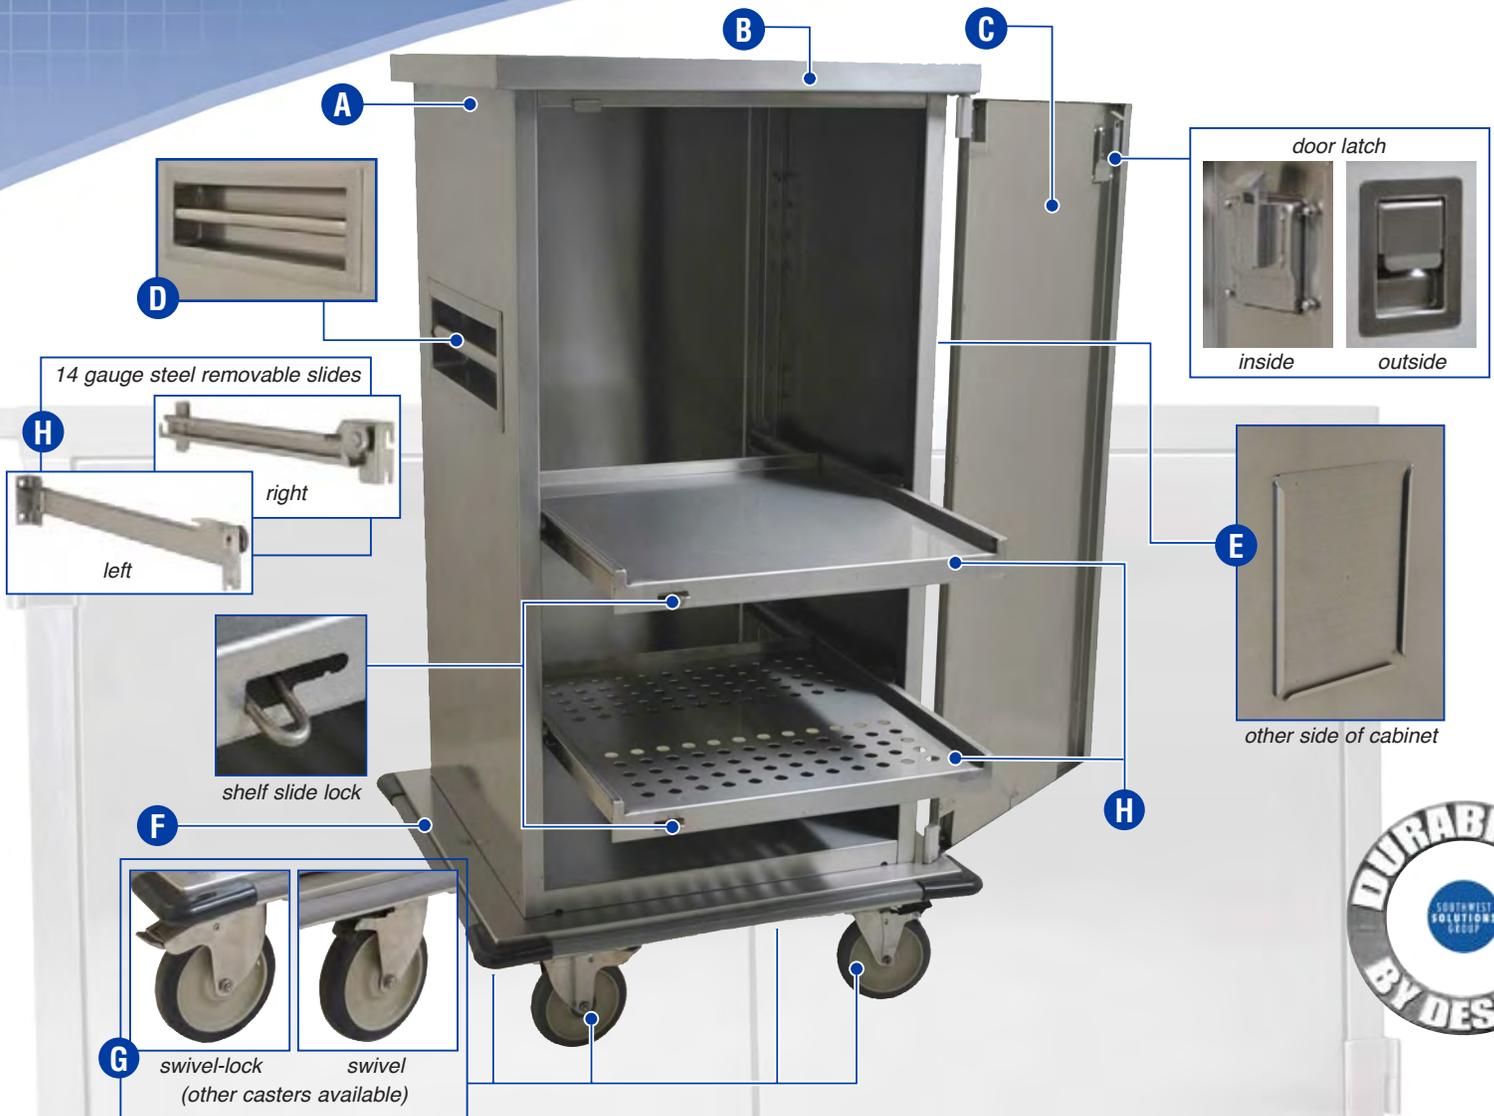

### STANDARD FEATURES — Please note: ***Bold/italicized text*** indicates what most competitors do not have as standard.

- A Cabinet** — 18 gauge type 300 stainless steel; Hemmed safety edges on all openings; ***Interlocking construction***, for a rigid and quieter cabinet, absorbs vibrations, prevents body torque and warping; Integrated weep holes promote drainage.
- B Top** — 16 gauge type 300 stainless steel; reinforced with hemmed C-channels.
- C Door** — 20 gauge stainless steel; Double-panel; Integral drain system; Reinforced with X-channels; Door swings 270° open (all the way to the side of the cabinet); ***Field-replaceable spring-loaded nylon roller latch*** holds door open.
- D Handle** — Recessed, stainless steel, located at left-hand side of cabinet.
- E Document Holder** — 8.5" x 11" letter-size; Stainless steel; located at right-hand side of cabinet; Optional sizes available.
- F Dolly Frame** — 16 gauge stainless steel 2" square tubing; 12 gauge caster mounting plates; Non-marring bumper with ***field-replaceable individual reinforced corners*** prevent damage to cabinet and nearby walls.
- G Casters** (see "Step 2" on back page) — Stainless steel fork; ***6"-diameter wheels***; Polyurethane tread; Grease fittings; Cart-washable; Swivel casters available include casters with brake and swivel-lock casters, which prevent case cart from "fishtailing" during transport.
- H Internal Shelves** (see "Step 3" on back page) — 14 gauge ***slides with stainless steel high-temperature bearings***; Shelf slide lock prevents shelf and contents from sliding out of cabinet; Removable—or adjustable in 2" increments—with no tools required; Offered are perforated stainless steel, solid stainless steel, and heavy gauge wire shelves.

# Some of our advantages...

## WHAT WE HAVE...

*Shelf slides with stainless high-temperature bearings for better mobility*




## WHAT THEY HAVE...

*Friction slides*



## WHAT WE HAVE...

*Interlocking cabinet design with stainless steel interchangeable chassis and square tubing*

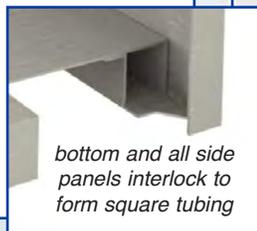

## WHAT WE HAVE...

*6"-diameter casters for better maneuverability*



## WHAT THEY HAVE...

*Angle frame or unibody, which will warp over time.*

## WHAT THEY HAVE...

*5"-diameter casters*

## WHAT WE HAVE...

*Unmatched replaceability of individual components!*

## WHAT THEY HAVE...

*If a component goes bad, entire cart must be replaced!*

# To order a cart...

## Step 1 Select cart body.

- Type 300 series stainless steel construction
- Double-panel reinforced doors with removable positive latching system
- Bumper with reinforced corners
- Letter-size document holder
- Push handles



### SINGLE-WIDTH CARTS...

OUTSIDE DIMENSIONS OF CABINET			OVERALL DIMENSIONS			model #
front-to-back	end-to-end	height	front-to-back	end-to-end	height*	
24 <sup>3</sup> / <sub>4</sub> "	24"	21 <sup>3</sup> / <sub>4</sub> "	30"	29"	31 <sup>1</sup> / <sub>2</sub> "	SMS83ESCSC1
24 <sup>3</sup> / <sub>4</sub> "	24"	30 <sup>3</sup> / <sub>4</sub> "	30"	29"	40 <sup>1</sup> / <sub>2</sub> "	SMS83ESCSC2
24 <sup>3</sup> / <sub>4</sub> "	24"	47 <sup>3</sup> / <sub>4</sub> "	30"	29"	57 <sup>1</sup> / <sub>2</sub> "	SMS83ESCSC3

### DOUBLE-WIDTH CARTS...

OUTSIDE DIMENSIONS OF CABINET			OVERALL DIMENSIONS			model #
front-to-back	end-to-end	height	front-to-back	end-to-end	height*	
24 <sup>3</sup> / <sub>4</sub> "	39"	47 <sup>3</sup> / <sub>4</sub> "	30"	46"	57 <sup>1</sup> / <sub>2</sub> "	SMS83ESCSC4
24 <sup>3</sup> / <sub>4</sub> "	39"	30 <sup>3</sup> / <sub>4</sub> "	30"	46"	40 <sup>1</sup> / <sub>2</sub> "	SMS83ESCSC5
24 <sup>3</sup> / <sub>4</sub> "	49"	30 <sup>3</sup> / <sub>4</sub> "	30"	55"	40 <sup>1</sup> / <sub>2</sub> "	SMS83ESCSC6

\* Heights include 6"-diameter casters. See Step 2 for casters.

Custom sizes available. Contact factory.

## Step 2 Select casters.

Stainless steel. 6"-diameter wheel. Set of four.

description	add suffix # *
two swivel casters, two swivel with brake	-SWB
one swivel caster, one with brake, two swivel-lock	-SWBL

\* Example: ELCSC-1-SWB



swivel  
caster



swivel-lock  
caster

## Step 3 Select internal shelves.



### PERFORATED SHELF

Stainless steel. 3/4"-diameter perforations.

description	model #
for Single-Width Carts	SMS83ELCSCSP
for Double-Width Carts	SMS83ELCSCDP
for Extended Double-Width Carts	SMS83ELCSCPEP



### WIRE SHELF

Stainless steel heavy gauge wire.

description	model #
for Single-Width Carts	SMS83ELCSCSW
for Double-Width Carts	SMS83ELCSCDW
for Extended Double-Width Carts	SMS83ELCSCSEW



### SOLID SHELF

Heavy gauge type 300 stainless steel.

description	model #
for Single-Width Carts	SMS83ELCSCSS
for Double-Width Carts	SMS83ELCSCDS
for Extended Double-Width Carts	SMS83ELCSCES

